

Recessed Viewer Systems



AT LAST...Standard D5000 Viewing Easily Recessed Into Countertops & Work Areas!

GTI now makes it possible to install *high quality, accurate, and consistent* color viewing systems directly into new or existing work areas and retail countertops. Graphiclite® Recessed Viewer Systems promote optimum color communication by providing the precise D5000 lighting conditions for color evaluation as specified by the Industry Standard!

Graphiclite Recessed Viewer Systems are manufactured from the same critical components as the tight tolerance Graphiclite GLX series Transparency Viewers. Features include: full spectrum Graphiclite 100 Color Viewing Lamps, superior color quality, special non-glare Plexiglas®, and a high efficiency reflector system which creates uniform luminance, eliminating shadows and "hot spots".

• Two Model Styles • Four Standard Sizes • Custom Dimensions •



RVS-16 installed in counter




RVS components

Model RVS Recessed Viewer System

"Do-It Yourself" Installation

RVS models offer quick and easy "drop-in" installation. The high-tech anodized aluminum viewer frame complements any environment. The RVS plugs into a standard grounded outlet and is controlled by a cleverly integrated on/off switch built right into the viewer frame. (Easily accommodates a glass surface directly over Plexiglas®)

RVS installation - As easy as...

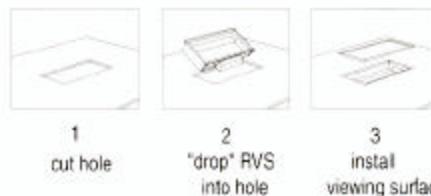

Model RVA Recessed Viewer Assembly Custom Installation Kit

RVA models require carpentry skills and the simple installation of a switched outlet. This custom installation results in an attractive flush fitted viewing surface. (*Installation instructions shipped with unit.*)



RVA-20 installed in counter



RVA components

SPECIFICATIONS

Model No.	Cut-Out Dimensions (Inches/Centimeters)			Viewing Area (Inches/Centimeters)			Physical Dimensions (Inches/Centimeters)			Electrical Power-Watts	Shipping Weight Pounds-Kilos
	Depth	Width	Depth	Width	Height	Width	Depth	Width	Depth		
RVS-10	12.10" (31 cm)	15.80" (40 cm)	10" (25 cm)	14" (36 cm)	13.75" (35 cm)	15.75" (40 cm)	4.75" (12 cm)	96	15 lbs (7 kgs)		
RVS-16	12.10" (31 cm)	24.80" (63 cm)	10" (25 cm)	23" (58 cm)	13.75" (35 cm)	24.75" (63 cm)	4.75" (12 cm)	60	18 lbs (8 kgs)		
RVS-20	18.10" (46 cm)	24.80" (63 cm)	16" (41 cm)	23" (58 cm)	19.75" (50 cm)	24.75" (63 cm)	4.75" (12 cm)	72	24 lbs (11 kgs)		
RVS-44	18.10" (46 cm)	48.80" (124 cm)	16" (41 cm)	47" (119 cm)	19.75" (50 cm)	48.75" (124 cm)	4.75" (12 cm)	140	41 lbs (19 kgs)		
RVA-10	10" (25 cm)	11" (28 cm)	10" (25 cm)	11" (28 cm)	14.5" (37 cm)	15.75" (40 cm)	4.25" (11 cm)	96	15 lbs (7 kgs)		
RVA-16	10" (25 cm)	20" (51 cm)	10" (25 cm)	20" (51 cm)	14.5" (37 cm)	24.75" (63 cm)	4.25" (11 cm)	60	18 lbs (8 kgs)		
RVA-20	16" (41 cm)	20" (51 cm)	16" (41 cm)	20" (51 cm)	20.5" (52 cm)	24.75" (63 cm)	4.25" (11 cm)	72	24 lbs (11 kgs)		
RVA-44	16" (41 cm)	44" (112 cm)	16" (41 cm)	44" (112 cm)	20.5" (52 cm)	48.75" (124 cm)	4.25" (11 cm)	140	41 lbs (19 kgs)		

Specifications subject to modification.